
JUE-95VM Inmarsat C VMS



– JRC introduces a highly user-friendly vessel monitoring system solution

Compact antenna design

Easy installation

Built-in GPS receiver

Low cost of ownership

Capable to use for email

JUE-95VM Inmarsat C VMS – performance features

Unique features

- The JUE-95VM plays a leading role to assist in faster and more accurate monitoring of vessel location, integrating the latest advancements in technologies and packed into a small compact unit.



About VMS

Vessel Monitoring System (VMS) is primarily used in commercial fishing, allowing environmental and fisheries regulatory organisations to monitor, the position, time at a position, and course and speed of fishing vessels. VMS also helps to protect fisheries sustainability, by enabling the monitoring of fishing activity around borders and closures.

Compact solution

With the JUE-95VM Inmarsat C, VMS, JRC has developed a compact, mobile satellite communication system, to allow quick and easy world wide tracking of a vessels precise location, utilising two-way data messaging. Fisheries monitoring are usually costly and difficult. JRC's formidable formula, a compact, affordable JUE-95VM system, integrating the latest technologies, makes monitoring of fishing activities cost-effective and highly accurate.

JRC StarNetwork™

JRC has been providing sales and support of products since 1915. Today, JRC offers comprehensive assistance through its organisation, in partnership with a worldwide StarNetwork™ of over 270 fully trained and qualified partners and agents, assisting you 24 hours a day, 7 days a week and 365 days a year.



JRC one-call™

One number to call

With JRC you can go anywhere and if you need our support, simply call us at +81 3 3492 9201, anytime.

JUE-95VM Inmarsat C VMS

– system flexibility


Self diagnosis

JRC's mobile JUE-95VM terminal incorporates various self-diagnostic programmes to facilitate maintenance and troubleshooting, reporting any possible problems it might suffer. The results are displayed on the data terminal. These functions will allow for easy maintenance and more reliability. In addition, automatic testing for performance verification and commissioning via the satellite channel is also available.

JCmail

JCmail, a freeware application developed by JRC, enables you to transmit and receive email messages very easily on your PC.

In addition, this programme allows you to receive Enhanced Group Calling (EGC) messages. EGC enables authorised information providers to broadcast international safety and commercial service message to selected group of ships.

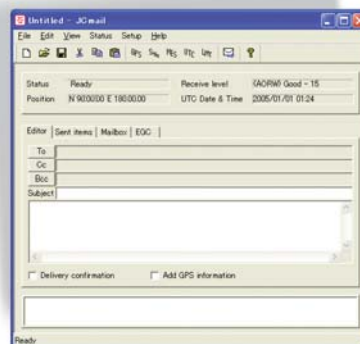


Flexible installation


The JUE-95VM system has the same cable management philosophy resembling all other Inmarsat products that JRC is offering, allowing for an easy installation as only a single coax cable is used between antenna and terminal. Both are very compact and can be easily installed on any size and type of commercial fishing vessel.

Dimension drawings - Antenna, Polar mounting bracket

NAF-742VM
Weight 1,5 kg





MPXP33401¹
Weight 0,8 kg

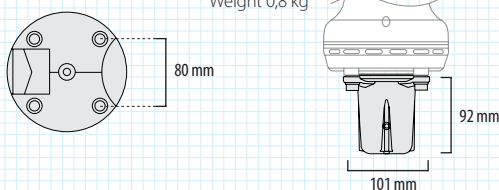

¹ pole mounting bracket is included as standard - pole \varnothing 34mm

Dimension drawings - Terminal

NTF-782VM
Weight 1,3 kg



JUE-95VM Inmarsat C VMS

– specifications

What's standard in the box?

- | | | |
|--------------------------|---------------------|------|
| 1. Antenna | Which cable? | |
| 2. Terminal | Antenna to terminal | 15 m |
| 3. Cable | | |
| 4. Pole mounting bracket | | |
| 5. Spare parts | | |
| 6. Manual (English) | | |

Model		JUE-95VM
Inmarsat type approved		✓
Class of Inmarsat C MES		Class 2
Terminal and antenna		
Model – terminal		NTF-782VM
Model – antenna		NAF-742VM (including pole mounting bracket)
Frequency		TX 1626.5MHz - 1646.5MHz RX 1530.0MHz - 1545.0MHz
		GPS 1575.2 MHz ±1MHz
Channel spacing		5KHz
G/T		-23.7dB/K minimum at 5° angle
E.I.R.P.		+7 to +16dBW
Modulation		TX and RX: 1200 symbols/sec BPSK
Data rate		TX: 600bps RX: 600bps
Antenna		type: helical pattern: hemisphere polarisation: right hand circular
Power supply voltage		DC 24V (+30% -20%)
Power consumption		TX 75W, RX 25W
Ambient condition		antenna: -35°C +55°C terminal: -15°C +55°C
Preservation temperature		-40°C +80°C
Relative humidity		+40°C up to 95%
Icing		up to 25mm (antenna)
Precipitation		100mm/hour (antenna)
Wind		up to 100 knots
Vibration		as specified by Inmarsat
Optional items		
Power supply unit (AC/DC)		NBD-857A

All specifications are subject to change without notification.

For further information please contact:



Japan Radio Co., Ltd.

JRC
 Cessnalaan 40-42
 1119 NL, Schiphol-Rijk, The Netherlands
T +31 20 6 580 750
F +31 20 6 580 755
E sales@jrceurope.com
W www.jrceurope.com